

FEATURES


- Bimetal helix system
- Hermetically sealed
- Stem length max 1.5 Mtr
- Optional External Zero adjustment
- ATEX approved

APPLICATION

- Liquid & gaseous mediums
- Corrosive environments
- Oil & Gas applications
- Chemical & Petrochemical
- Food & Beverages
- Nuclear power plants

General purpose

ATEX 2014/34/UE

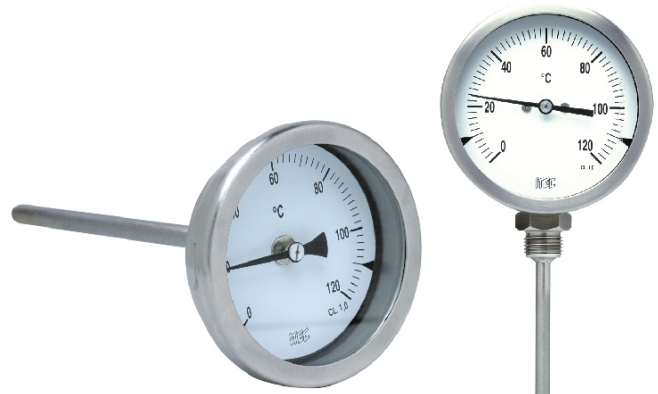

STANDARD PARAMETERS

Accuracy	: CL 1.0 (Class 1)
Ambient temperature	: -20...+60°C
Over range limits	: 110% full scale
Stem pressure rating	: 25 bar (Without thermowell)
Weld joints	: TIG argon arc welding

MATERIAL OF CONSTRUCTION

Sensing element	: Coiled bimetal strip
Case & Ring material	: AISI 304 SS
Stem & Process connection material	: AISI 316 SS
Dial	: Aluminum, black graduation on white background
Pointer	: Slotted zero adjustable, aluminum, black powder coated (Fix pointer for DN50)
Gaskets	: NBR
Window	: Sheet glass

STANDARD SPECIFICATIONS

Dial size	: DN50 / DN 63 / DN80 / DN100 / DN125 / DN150
Range	: -80...0...400 °C / -110...0...752 °F
Mounting pattern	: Direct Bottom connection
Stem size	: 6.0 mm
Ingress protection	: IP 65
Stem length	: 25 mm to 1500 mm*
Process connection type	: Adjustable connection
Process connection	: 1/2" NPT (M) / 1/2" BSP (M)

STANDARD SPECIFICATIONS : DAMPENING LIQUID FILLED, GLYCERIN

Gaskets & Filling plugs	: NBR
Dampening liquids	: Glycerin 99.7% (-20°C to 65°C) [Up to range 100°C]
Window	: Shatterproof safety glass

STANDARD SPECIFICATIONS : DAMPENING LIQUID FILLED, SILICON

Gaskets & Filling plugs	: NBR
Dampening liquids	: Silicon oil [Up to range 200°C]
Window	: Shatterproof safety glass

REFERENCE





EN 13190

II 2 GD c


* Depending on range & stem diameter

DIMENSIONAL DRAWING

Mounting Pattern: B0

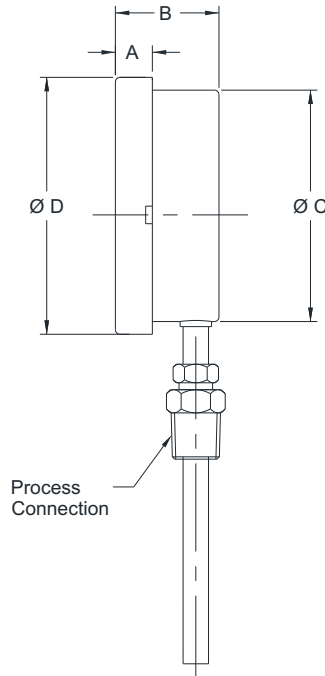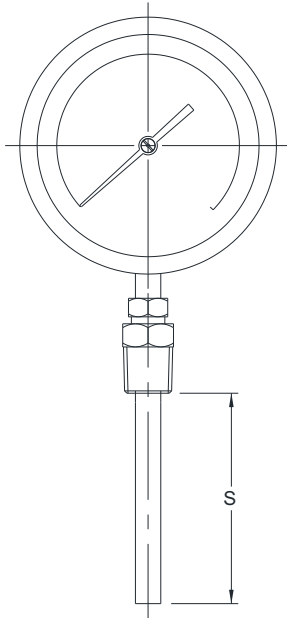

Mounting Pattern: R0

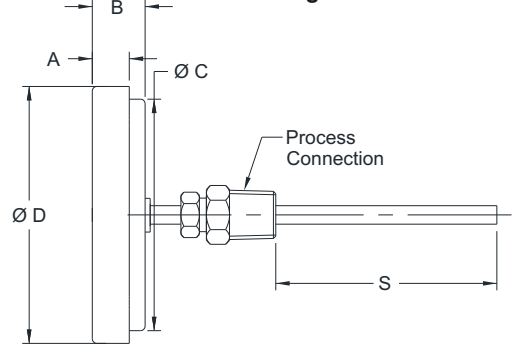


NS	A	B	ØC	ØD	S	Weight (gram)
50	6.5	23	51.5	57.5	*	108
63	12	48	62.5	70	*	280
80	9.5	48	80	89.5	*	350
100	12	48	100	111	*	500
125	15	48	118.5	129	*	580
150	15	48	149	161	*	800

NS	A	B	ØC	ØD	S	Weight (grams)
50	6.5	23	51.5	57.5	*	108
63	10	23	62.5	70	*	156
80	9.5	23	80	89.5	*	244
100	12	23	100	111	*	518
125	15	23	118.5	129	*	585
150	15	23	149	161	*	625

All dimensions are in mm.

* As per customer requirement.

STEM LENGTH CHART

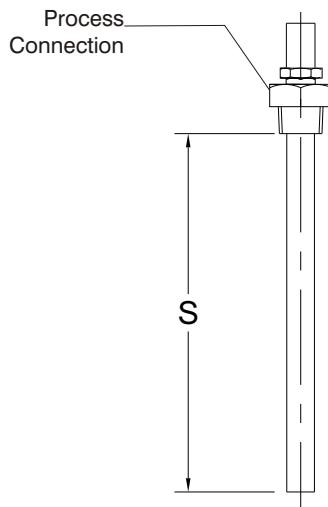

Stem Diameter	6 mm & ¼"	8 mm	10 mm	12 mm
Range (°C)	Min. Stem Length (mm)			
0...50	130	110	110	110
0...60	110	95	95	95
0...80	95	70	70	70
0...100	75	70	70	70
0...120	70	60	60	60
0...150	60	50	50	50
0...200	50	45	45	45
0...250	40	35	35	35
0...300	60	50	50	50
0...400	50	45	45	45

1. All length mentioned above are to be considered below thread only.
2. For other reduced length, contact factory before ordering.

NOTES

1. DN50 is available in Centre back connection (R0) only.
2. Equivalent scales available in °F, °C/°F, °F/°C. Please contact factory for details.

ORDERING CODES

1. DIAL SIZE	04	7. PROCESS CONNECTION TYPE	KW
02 50 mm / 2"	04	KX Fixed connection	KW
25 63 mm / 2½"		KW Adjustable connection	
03 80 mm / 3"		BW Swivel / Revolving connection	
04 100 mm / 4"			
05 125 mm / 4½"			
06 150 mm / 6"			
2. RANGE	C16	8. PROCESS CONNECTION	14N
XXX Refer "Range Table"	C16	14N ½" NPT (M)	14N
		14B ½" BSP (M)	
		12N ¼" NPT (M) ³	
		12B ¼" BSP (M) ³	
		14M M20 X 1.5 mm (M)	
		13B 3/8" BSP (M) ⁴	
		T15 1.5" Triclover	
		15N ¾" NPT (M)	
		15B ¾" BSP (M)	
		04N ½" NPT (F)	
		05N ¾" NPT (F)	
		16M M27 X 2.0 mm (M)	
3. MOUNTING PATTERN	B0	9. OTHER OPTIONS	XX
B0 Direct, Bottom connection	B0	BA Case & Ring in AISI 316 SS (B0)	XX
R0 Centre, Back connection		BG Case & Ring in AISI 316 SS (R0)	
		GC Shatterproof safety glass	
		GZ External zero adjustment	
		OA Dampening liquid, silicon oil (200°C)	
		RA Rubber parts, Viton	
		TA 5 - point factory calibration certificate	
		TM Material test certificate 2.2	
		XF SS tag plate, AISI 304 SS	
		XG SS tag plate, AISI 316 SS	
		XT Dial tag marking	
		XR Custom designed dial	
		EG Dampening liquid, glycerin (65°C)	
4. STEM DIAMETER	M60		
M60 6.0 mm	M60		
I14 ¼" (6.35 mm)			
M80 8.0 mm			
M95 9.5 mm			
M10 10 mm			
M12 12 mm			
5. INGRESS PROTECTION	ER		
ER IP 65	ER		
ES IP 66			
ET IP 67			
EU Hermetically sealed			
6. STEM LENGTH	150		
XXXX Up to 1,500 mm	150		

Ordering Example : T501-04-C16-B0-M60-ER-150-KW-14N

RANGE TABLE

RANGE(°C)	CODE	RANGE(°C)	CODE	RANGE(°C)	CODE
-20...+40	C01	0...50	C13	0...200	C20
-20...+60	C02	0...60	C14	0...250	C21
-30...+70	C08	0...80	C15	0...300	C22
-30...+120	C05	0...100	C16	0...400	C23
-50...+100	C11	0...120	C17		
-80...+120	C12	0...150	C18		

NOTES

- For other connections, please contact factory.
- DN50 is available in Centre back connection (R0) only.